



SOSR Stand Off Two Hole Strap for cPVC Pipe

Features

- Includes flared edges to protect piping
- Rated for use with CPVC fire sprinkler pipe
- Positions pipe 1-1/2" (38 mm) off the mounting surface eliminating the need for wooden spacer blocks
- Can be mounted in both vertical and horizontal positions on concrete, steel and wood
- Meets the UL® 203 stringent upward thrust requirement
- UL® Listed as both a hanger and pipe restrainer
- Complies with static load requirements of NFPA® 13
- Includes mounting screws
- Can be used with 3TW backing nut on composite wood joist installations



Material



Steel

Finish

Pregalvanized

Dimensions

DN	Size		HS	A	B	C	T	Hanger Spacing	Ordering Codes
	OD	Inch							
20	26.9	3/4"	5.1	68	92	25.4	1.3	1.65m Max	RDC597805
25	33.7	1"	5.1	75	94	25.4	1.3	1.80m Max	RDC597806
32	42.2	1 1/4"	5.1	84	92	25.4	1.6	1.95m Max	RDC597807
40	48.3	1 1/2"	5.1	98	114	25.4	1.6	2.10m Max	RDC597808
50	60.3	2"	5.1	102	133	25.4	1.6	2.40m Max	RDC597809

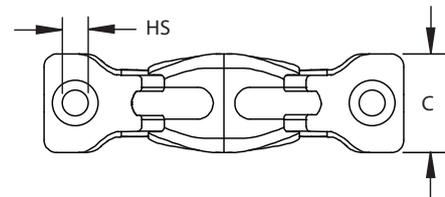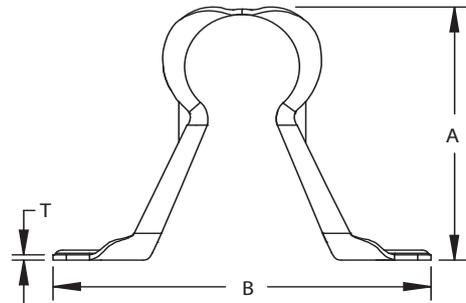

Manufactured by nvent Caddy who hold cULus Listed

DS: 9.30
Issue A
05/07/2019
© 2019 Rapidrop

Rapidrop Global Ltd
T: +44 (0) 1733 847 510 F: +44 (0) 1733 553 958
e: rapidrop@rapidrop.com
w: www.rapidrop.com