



## Threaded Pitcher Tee Model DRG009

### General Description

Rapidrop pitcher tees are used within a dry or wet riser system. The female thread connection allows direct installation of male threaded landing valves.

### Material Specification

Cast Iron

### Finish

Galvanized

### Working Pressure

Max. Working Pressure 20.7 bar (300 psi)


### Connections

#### Riser

DN100 (4") Groove as per ISO6182 / AWWA C606

#### Threaded Outlet

BSPP Female thread (Rp 2 1/2") as per BS EN 10226-1

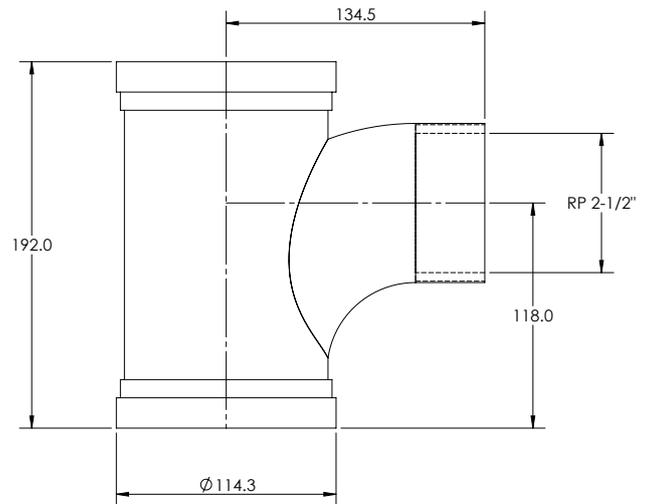

Model Number (Galvanised)	Rp mm/in	Pipe O.D mm/in	Max. Working Pressure bar/psi
RDDR009	65 2 1/2"	114.3 4.5"	20.7 300

Manufactured by Weifang 100Tong Casting Co. Ltd. who hold the FM Approval and UL Listing