



2-Way Inlet Breaching Valve Model: DRV008

Product Description

An Inlet breaching valve is installed at ground level to provide a connection to the water supply. The system is usually dry and charged by the fire brigade in an emergency. DRV008 has 2 inlets which are 2 1/2" male instantaneous connections to BS336 and fitted with non-return valves, a 1" drain valve, caps and chains. 2 way inlet breaching valves can be installed in the vertical or horizontal position

Working Pressure

Max Working Pressure 13 bar


Features

- Available in PN16 flange or Table D flange
- Valve body is hydrostatically tested to 20 bar
- Non-return valves tested to 1.7 bar
- Manufactured from ductile iron



Standards

Manufactured in accordance with BS5041: Part 3: 1987

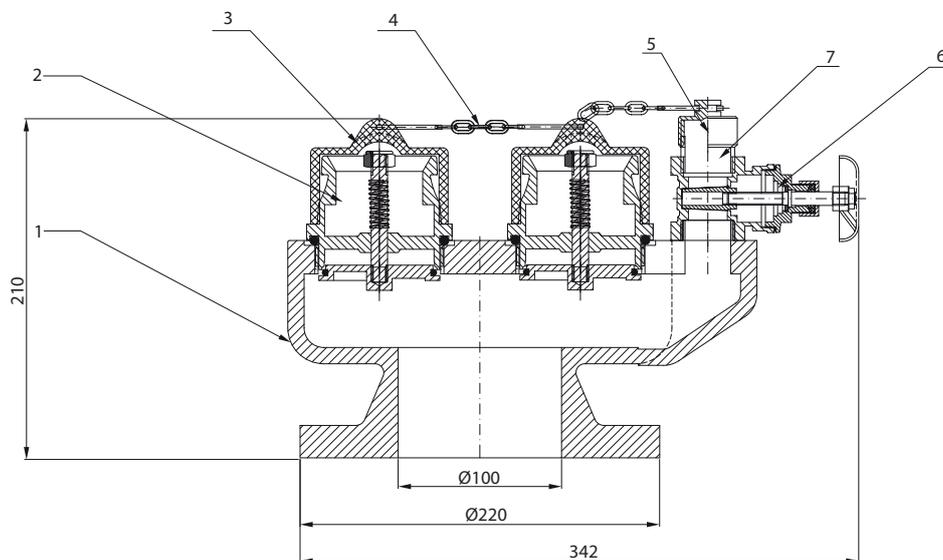

Specifications

| | |
|-------------------------------|--------------------------|
| Size | 100mm (4") |
| Material | Ductile Iron |
| Pressure Rating | 13 bar |
| Inlet Connection | Instantaneous BS336 Male |
| Outlet Connection | PN16 Flanged / Table D |
| Manufactured in Accordance to | BS5041 Part 3 |

Material Specifications

| Item | Part Description | Qty | Material |
|------|------------------|-----|------------------------|
| 1 | Valve Body | 1 | Ductile Iron |
| 2 | Connecting Seat | 2 | Assembly |
| 3 | Cap | 2 | Rubber |
| 4 | Chain | 1 | Stainless Steel 304 |
| 5 | Aluminium Cap | 1 | 6061 |
| 6 | 1" Gate Valve | 1 | Assembly |
| 7 | 1" Joint | 2 | Steel (Nickel Plating) |