

## Redukcja koncentryczna rowkowana

### Model 240




#### Specyfikacja materiałowa

- Korpus - żeliwo, ASTM A536

#### Wykończenie

- Malowane - czerwony (RAL 3000)
- Ocynkowane

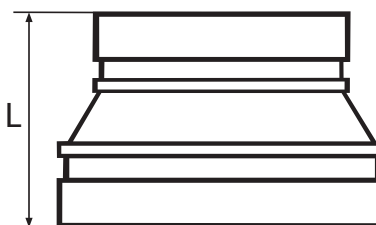

Model (czerwone)	Model (ocynkowane)	Rozmiar mm/in	Średnica zewn. rury mm/in	Max ciśnienie robocze bar/psi			Wymiar L mm/in
				UL	FM / CNBOP	VdS	
RD240G042033	RD240G042033G	32 x 25 1¼ x 1	42.4 x 33.7 1.660 x 1.315	34.5 500	34.5 500	16 232	64 2.50
RD240G048033	RD240G048033G	40 x 25 1½ x 1	48.3 x 33.7 1.900 x 1.315	34.5 500	34.5 500	16 232	64 2.50
RD240G048042	RD240G048042G	40 x 32 1½ x 1¼	48.3 x 42.4 1.900 x 1.660	34.5 500	34.5 500	16 232	64 2.50
RD240G060042	RD240G060042G	50 x 32 2 x 1¼	60.3 x 42.4 2.375 x 1.660	34.5 500	34.5 500	16 232	64 2.50
RD240G060048	RD240G060048G	50 x 40 2 x 1½	60.3 x 48.3 2.375 x 1.900	34.5 500	34.5 500	16 232	64 2.50
RD240G076048	RD240G076048G	65 x 40 2½ x 1½	76.1 x 48.3 3.000 x 1.900	34.5 500	34.5 500	16 232	64 2.50
RD240G076060	RD240G076060G	65 x 50 2½ x 2	76.1 x 60.3 3.000 x 2.375	34.5 500	34.5 500	16 232	64 2.50
RD240G089048	RD240G089048G	80 x 40 3 x 1½	88.9 x 48.3 3.500 x 1.900	34.5 500	34.5 500	16 232	64 2.50
RD240G089060	RD240G089060G	80 x 50 3 x 2	88.9 x 60.3 3.500 x 2.375	34.5 500	34.5 500	16 232	64 2.50
RD240G089076	RD240G089076G	80 x 65 3 x 2½	88.9 x 76.1 3.500 x 3.000	34.5 500	34.5 500	16 232	64 2.50
RD240G114048	RD240G114048G	100 x 40 4 x 1½	114.3 x 48.3 4.500 x 1.900	34.5 500	34.5 500	16 232	76 3.00
RD240G114060	RD240G114060G	100 x 50 4 x 2	114.3 x 60.3 4.500 x 2.375	34.5 500	34.5 500	16 232	76 3.00
RD240G114076	RD240G114076G	100 x 65 4 x 2½	114.3 x 76.1 4.500 x 3.000	34.5 500	34.5 500	16 232	76 3.00
RD240G114089	RD240G114089G	100 x 80 4 x 3	114.3 x 88.9 4.500 x 3.500	34.5 500	34.5 500	16 232	76 3.00

## Redukcja koncentryczna rowkowana

### Model 240




#### Specyfikacja materiałowa

- Korpus - żeliwo, ASTM A536

#### Wykończenie

- Malowane - czerwony (RAL 3000)
- Ocynkowane

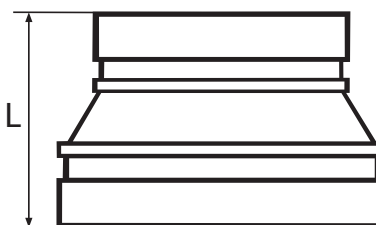

Model (czerwone)	Model (ocynkowane)	Rozmiar mm/in	Średnica zewn. rury mm/in	Max ciśnienie robocze bar/psi			Wymiar L mm/in
				UL	FM / CNBOP	VdS	
RD240G139060	RD240G139060G	125 x 50 5 x 2	139.7 x 60.3 5.500 x 2.375	25.2 365	34.5 500	-	89 3.50
RD240G139076	RD240G139076G	125 x 65 5 x 2½	139.7 x 76.1 5.500 x 3.000	20.7 300	34.5 500	16 232	89 3.50
RD240G139089	RD240G139089G	125 x 80 5 x 3	139.7 x 88.9 5.500 x 3.500	34.5 500	34.5 500	16 232	89 3.50
RD240G139114	RD240G139114G	125 x 100 5 x 4	139.7 x 114.3 5.500 x 4.500	34.5 500	34.5 500	16 232	89 3.50
RD240G168089	RD240G168089G	150 x 80 6 x 3	168.3 x 88.9 6.625 x 3.500	34.5 500	34.5 500	16 232	102 4.00
RD240G168114	RD240G168114G	150 x 100 6 x 4	168.3 x 114.3 6.625 x 4.500	34.5 500	34.5 500	16 232	102 4.00
RD240G168139	RD240G168139G	150 x 125 6 x 5	168.3 x 139.7 6.625 x 5.500	34.5 500	34.5 500	16 232	102 4.00
RD240G219114	RD240G219114G	200 x 100 8 x 4	219.1 x 114.3 8.625 x 4.500	34.5 500	34.5 500	16 232	127 5.00
RD240G219168	RD240G219168G	200 x 150 8 x 6	219.1 x 168.3 8.625 x 6.625	34.5 500	34.5 500	16 232	127 5.00
RD240G273168	RD240G273168G	250 x 150 10 x 6	273.0 x 168.3 10.750 x 6.625	20.7 300	20.7 300	16 232	152 6.00
RD240G273219	RD240G273219G	250 x 200 10 x 8	273.0 x 219.1 10.750 x 8.625	20.7 300	20.7 300	16 232	152 6.00