



Inlet Cabinet for 4 Way Inlet Breaching Valve DRC006 (red) DRC013 (stainless steel)

Product Description

The DRC006 & DRC013 inlet cabinets are designed to be recessed into the wall for easy access to the inlet breaching valve. The cabinet has a 38mm surrounding flange and is available in red RAL3002 (DRC006) or in Stainless Steel (DRC013) finish.

DRC006 cabinet is painted with Epoxy RAL3002 powder paint with UV protection to prevent colour fading.

The inlet cabinet and breaching inlet should be positioned as closely as possible to the rising main in order to reduce the pressure loss and within easily accessible reach of the attending fire appliance which should be in an un-obscured sight of fire crews and no more than 18 metres away from the nearest vehicular access.

The cabinets have a wired Georgian glass door complete with a slam shut lock and stainless steel piano hinge.




Standards

Designed and manufactured in accordance to BS5041 Part 5.

Outdoor Application

For outdoor applications Rapidrop Global recommend Stainless Steel cabinets.

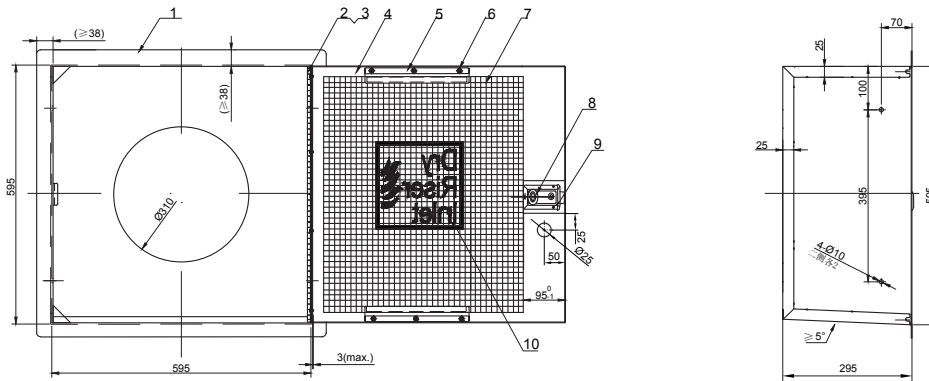

Dimensions

Dimensions			Weight Kg
Height mm	Width mm	Depth mm	
595	595	295	20

Material Specifications

Item	Part Description	Qty	Material
1	Cabinet Shell	1	Carbon Steel/ Stainless Steel 304
2	Hinge	1	Stainless Steel 304
3	Rivet	10	Aluminium
4	Door	1	Carbon Steel/ Stainless Steel 304
5	Press Plate	1	Carbon Steel/ Stainless Steel 304
6	Locking Nut	6	Copper
7	Wire Glass	1	Glass 540 x 465 x 6mm
8	Latch Lock	1	
9	Lock Screw	3	Steel BZP
10	Marking	1	

Specifications

	DRC006	DRC013
Cabinet & Door	Carbon steel	Stainless Steel 304
Finish	Red RAL 3002	Stainless Steel
Surrounding Flange	38mm wide all around	
Glass	6mm Georgian Wired	
Lock	Slam Shut Lock keyed alike	
Hinge	Stainless Steel piano hinge	